

GRATING SERVICES

Lionweld Kennedy gratings are produced at our manufacturing facility in the north east of England. As the only UK manufacturer, we can offer our extensive knowledge and expertise to ensure your project utilises the most economical, environmentally friendly and compliant gratings.

Gratings can be supplied as standard 6m x 1m panels or as fully bespoke fabricated grating panels.

6m x 1m STANDARD PANELS

These panels are open ended and can be supplied with a self colour or galvanised finish from our extensive stock range.

Non-stock items are generally available in 3-5 working days.

FABRICATION

A full design and fabrication service is available for all size of project ranging from 1m² up to 20,000m².

For larger projects, we have a comprehensive service offering, making Lionweld Kennedy the number one supplier of choice.

- 6 G E J P D E C M R H T Q Q J G P N [
- 7 - H Q T Y G N F G V G G V K P I
- O C P W H C E V W T G T
- 5 V C P F C D G U R G M B W O G P V C V K Q P
- R C E M
- 2 Q L G E V P C I G O G P V
- 9 G G M N I Q G T U G R Q P V
- (W N T C Y K U F T X K E G
-) T K P C P B C P F T C K I P
- \$ W K R F P H Q K O B V G K N I \$ + /
- . G X G B Q O R N K C P V

BALL PROOF

The maximum openings within a working platform or walkway shall not permit the passage of a 35mm diameter sphere, except where the working platform or walkway is above a place where people are working, as opposed to passing occasionally, then the maximum openings shall not permit the passage of a 20mm diameter sphere.

9 J G T G O G V C N V T G C F U Q T N C P F K P I U C T G W U G I shall not allow the passage of a 20mm ball.

British Standard, BS4592-0:2006+A1:2012.

LK 20mm BALL PROOF

- Fire Escape Stairs, landings
- Where people may be working below the walkway
- Where the walkway is in constant use

LK20BP MESH SIZE		
Bar Thickness	Load Bar Centres	Transverse Bar Centres
3mm	21mm	100mm*
5mm	23mm	100mm*

LK 35mm BALL PROOF

- Walkway where people may pass underneath occasionally

LK35BP MESH SIZE		
Bar Thickness	Load Bar Centres	Transverse Bar Centres
3mm	37mm	125mm*
5mm	38mm	125mm*

LK UTILITY GRATING

- Walkways below head height and where people can not pass underneath
- Shelving
- Fencing

UTILITY GRATING (Non-ball proof)		
Bar Thickness	Load Bar Centres	Transverse Bar Centres
3mm	47mm	125mm*
5mm	47mm	125mm*

* Other transverse bar centres are available on request.

DEFLECTION

British Standards stipulate two deflection restrictions that need to be considered when designing grating.


4mm DEFLECTION

To prevent grating panels becoming a trip hazard, the maximum allowable deflection between adjacent panels is 4mm.

If grating is designed to deflect to a maximum of 4mm, panel joining is NOT required.

L/200 OR 10mm

Joining panels together allows adjacent panels to deflect, under load, as a single entity, eliminating trip hazards. This allows the grating to be designed to L/200 or 10mm deflection, whichever is the lesser and allows the use of a lighter, more cost effective grating.

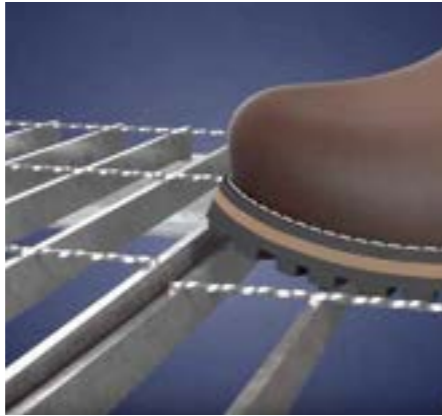

JOINING PANELS

Joining panels can easily be achieved but may require additional time on site or additions to your grating. Lionweld adopt two popular methods



PANEL JOINTING CLIP

Used to clip adjacent panels together, using a saddle top clip and double sided bottom plate. Access to the underside of the grating is required for fixing.

PANEL JOINTING PADS

Steel plates are welded to the underside of each grating panel, ensuring that adjacent panels are mutually supported and deflect as a single entity.

No additional fixing or bolting is required.



SELECTING YOUR GRATING

The Lionweld Kennedy safegrid load tables allow you to easily select a grating with either a 4mm or L/200 deflection. See pages 9-11.



SLIP RESISTANCE


Lionweld Kennedy can offer a range of serrated surfaces to provide the necessary level of slip resistance to your grating.

The slip resistance classifications in accordance with BS4592-0:2006+A1:2012 are:

1

Slip resistant 0.4 to less than 0.6 (CoF)

Slip resistant flooring shall be used in all areas where the risk assessment indicates foreseeable water wet contamination.

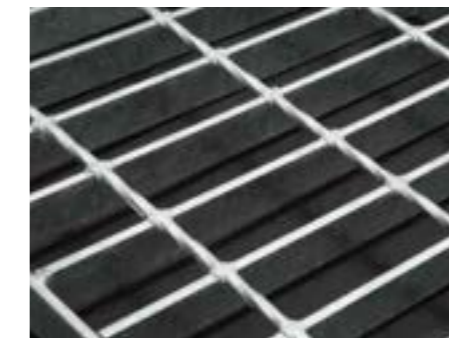


PLAIN


2

Enhanced slip resistant 0.6 (CoF)

Enhanced slip resistance shall be required where strenuous activity (for example, pushing and pulling equipment) is routinely undertaken on floorings under water wet contamination.

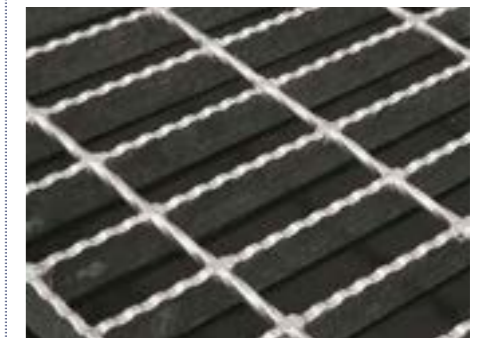

ROLLED SERRATED

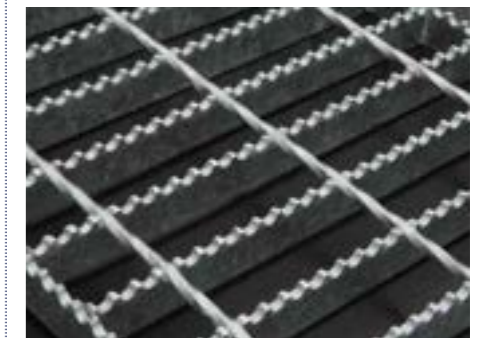

MACHINE SERRATED

FIXINGS

Frictional Fixings

Frictional fixings can be used to secure steel grating to the supporting steel work.

The fixing assembly consists of a universal bottom clip (Type 5), M8 hex nut, bolt and a top clip. The top clip is interchangeable and should be selected to suit each particular open mesh flooring.

TYPE 5 FIXING CLIP

With saddle top clip

- 35mm Ball Proof
- Utility Grating

With Narrow top clip

- 20mm Ball Proof



Positive Fixings

Positive fixings are used to secure the open grid flooring by bolting or firing through the steel support. This method is generally used when the steel structure is subject to excessive vibrations.

FIXING PAD

35mm x 5mm pad welded to the flooring with a 10mm hole to allow the grating to be fixed directly to the supporting structure.



DEEP SADDLE WITH A SELF TAPPING BOLT

A deep saddle clip is supplied to suit the depth of grating. A self tapping bolt is then used to secure the grating to the steel support.



LK 20mm BALL PROOF LOAD TABLES

3mm LK20BP (MESH SIZE 21/100)				20mm Ball Proof			
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 3	5kn/m ²	1075	3.98	1300	6.16	30.49	1.18
	7.5kn/m ²	1055	3.99	1155	5.73		
30 x 3	5kn/m ²	1305	4.00	1580	7.90	36.03	1.41
	7.5kn/m ²	1210	3.98	1390	6.90		
35 x 3	5kn/m ²	1535	3.99	1840	9.17	41.56	1.65
	7.5kn/m ²	1355	3.94	1620	8.05		
40 x 3	5kn/m ²	1655	4.00	2080	9.98	47.09	1.88
	7.5kn/m ²	1505	4.00	1855	9.23		

5mm LK20BP (MESH SIZE - 23/100)				20mm Ball Proof			
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 5	5kn/m ²	1290	3.90	1525	7.62	45.01	1.96
	7.5kn/m ²	1180	3.98	1340	6.63		
30 x 5	5kn/m ²	1485	3.98	1825	9.09	53.45	2.36
	7.5kn/m ²	1350	3.95	1610	8.00		
35 x 5	5kn/m ²	1665	4.00	2090	9.91	61.89	2.75
	7.5kn/m ²	1515	3.96	1880	9.39		
40 x 5	5kn/m ²	1830	3.94	2305	9.92	70.33	3.14
	7.5kn/m ²	1675	3.98	2105	9.94		
45 x 5	5kn/m ²	2005	3.97	2525	9.99	78.77	3.53
	7.5kn/m ²	1830	3.97	2305	9.99		
50 x 5	5kn/m ²	2160	4.00	2715	9.98	87.21	3.93
	7.5kn/m ²	1975	3.99	2485	9.99		
60 x 5	5kn/m ²	2460	3.98	3095	9.98	104.09	4.71
	7.5kn/m ²	2255	3.98	2835	9.95		

NOTES

1. The tables are based on BS4595-0:2006+A1:2012 and BS5950-1:2000 which is a 5kn/m² / 7.5kn UDL or a 1.5kn point load over a 200mm x 200mm contact area, whichever is the more onerous.
2. The tables take into consideration MINIMUM bearing bar rolling tolerances as defined by LKFS-STD-98
3. Material is BS EN 10025 Grade S275JR
4. These load tables are applicable to gratings with plain load bearing bars only. For serrated grating load tables, contact our sales team on 01642 233299 or sales@lk-uk.com



LK 35mm BALL PROOF LOAD TABLES

3mm LK35BP (MESH SIZE - 37/125)		35mm Ball Proof					
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 3	5kn/m ²	875	3.99	930	4.61	18.74	1.18
	7.5kn/m ²	875	3.99	930	4.61		
30 x 3	5kn/m ²	1060	4.00	1170	5.05	22.03	1.41
	7.5kn/m ²	1060	4.00	1170	5.82		
35 x 3	5kn/m ²	1240	3.96	1420	5.43	25.33	1.65
	7.5kn/m ²	1195	3.97	1365	6.77		
40 x 3	5kn/m ²	1430	3.98	1700	7.35	28.63	1.88
	7.5kn/m ²	1320	3.95	1565	7.79		

5mm LK35BP (MESH SIZE - 38/125)		35mm Ball Proof					
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 5	5kn/m ²	1145	3.99	1310	6.51	28.74	1.96
	7.5kn/m ²	1050	3.96	1150	5.70		
30 x 5	5kn/m ²	1330	4.00	1575	7.86	34.04	2.36
	7.5kn/m ²	1205	3.96	1385	6.91		
35 x 5	5kn/m ²	1490	3.97	1835	9.13	39.34	2.75
	7.5kn/m ²	1355	3.98	1615	8.03		
40 x 5	5kn/m ²	1645	3.97	2070	9.96	44.64	3.14
	7.5kn/m ²	1495	3.95	1845	9.18		
45 x 5	5kn/m ²	1800	3.98	2265	9.98	49.94	3.53
	7.5kn/m ²	1635	3.96	2060	9.98		
50 x 5	5kn/m ²	1940	3.98	2440	9.95	55.24	3.93
	7.5kn/m ²	1765	3.96	2225	9.99		
60 x 5	5kn/m ²	2200	4.00	2790	9.98	65.84	4.71
	7.5kn/m ²	2020	3.96	2545	9.98		

NOTES

- The tables are based on BS4595-0:2006+A1:2012 and BS5950-1:2000 which is a 5kN/m² / 7.5kN UDL or a 1.5kN point load over a 200mm x 200mm contact area, whichever is the more onerous.
- The tables take into consideration MINIMUM bearing bar rolling tolerances as defined by LKFS-STD-98
- Material is BS EN 10025 Grade S275JR
- These load tables are applicable to gratings with plain load bearing bars only. For serrated grating load tables, contact our sales team on 01642 233299 or sales@lk-uk.com



LK UTILITY GRATING LOAD TABLES

3mm UTILITY GRATING (MESH SIZE - 47/125)		Non-Ball Proof					
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 3	5kn/m ²	775	3.69	775	3.69	15.20	1.18
	7.5kn/m ²	775	3.69	775	3.69		
30 x 3	5kn/m ²	965	3.98	1035	4.70	17.79	1.41
	7.5kn/m ²	965	3.98	1035	4.70		
35 x 3	5kn/m ²	1135	3.99	1255	5.05	20.38	1.65
	7.5kn/m ²	1125	3.99	1255	6.17		
40 x 3	5kn/m ²	1305	3.98	1495	5.46	22.97	1.88
	7.5kn/m ²	1245	3.98	1440	7.12		

5mm UTILITY GRATING (MESH SIZE - 47/125)		Non-Ball Proof					
Bearing Bar Dimensions (mm)	Loading Category	Max Clear Span 4mm Deflection	Deflection (mm)	Max Clear Span L/200 or 10mm Max Deflection	Deflection (mm)	Self Colour Weights Per Square Metre (kgs)	Binding Bar Weight Based on 2x1m (kgs)
25 x 5	5kn/m ²	1050	3.98	1225	6.10	23.84	1.96
	7.5kn/m ²	995	3.92	1075	5.34		
30 x 5	5kn/m ²	1265	4.00	1470	7.29	28.16	2.36
	7.5kn/m ²	1145	3.96	1290	6.38		
35 x 5	5kn/m ²	1415	3.95	1715	8.52	32.47	2.75
	7.5kn/m ²	1285	3.95	1510	7.53		
40 x 5	5kn/m ²	1565	3.97	1960	9.77	36.79	3.14
	7.5kn/m ²	1420	3.95	1725	8.59		
45 x 5	5kn/m ²	1710	3.96	2155	9.98	41.11	3.53
	7.5kn/m ²	1555	3.97	1955	9.91		
50 x 5	5kn/m ²	1850	3.99	2325	9.97	45.43	3.93
	7.5kn/m ²	1680	3.97	2115	9.97		
60 x 5	5kn/m ²	2115	3.99	2660	9.98	54.06	4.71
	7.5kn/m ²	1925	3.98	2420	9.95		

NOTES

- The tables are based on BS4595-0:2006+A1:2012 and BS5950-1:2000 which is a 5kN/m² / 7.5kN UDL or a 1.5kN point load over a 200mm x 200mm contact area, whichever is the more onerous.
- The tables take into consideration MINIMUM bearing bar rolling tolerances as defined by LKFS-STD-98
- Material is BS EN 10025 Grade S275JR
- These load tables are applicable to gratings with plain load bearing bars only. For serrated grating load tables, contact our sales team on 01642 233299 or sales@lk-uk.com

